



CARATTERISTICHE - SPECIFICATIONS

| | | | |
|---------|-----------|---------------------------|-------------------------------------|
| IN | DIAMETER | ∅ | (N°2) 1"1/4 BSP (N°2) 40mm 1.57" |
| | PRESS. | Min. | -0.2 Bar -3 PSI |
| | | Max. | 6 bar 87 PSI |
| TEMP. | Max. | 60° C. 140° F. | |
| OUT | DIAMETER | ∅ | (N°2) 3/4" BSP |
| | VALVE | Out | 1" BSP / 1"1/4BSP (C1258) |
| By-pass | | 1" BSP / 1"1/2BSP (C1258) | |
| OIL | SAE 75W90 | | 2.8 litri - 0.74 U.S.G. |

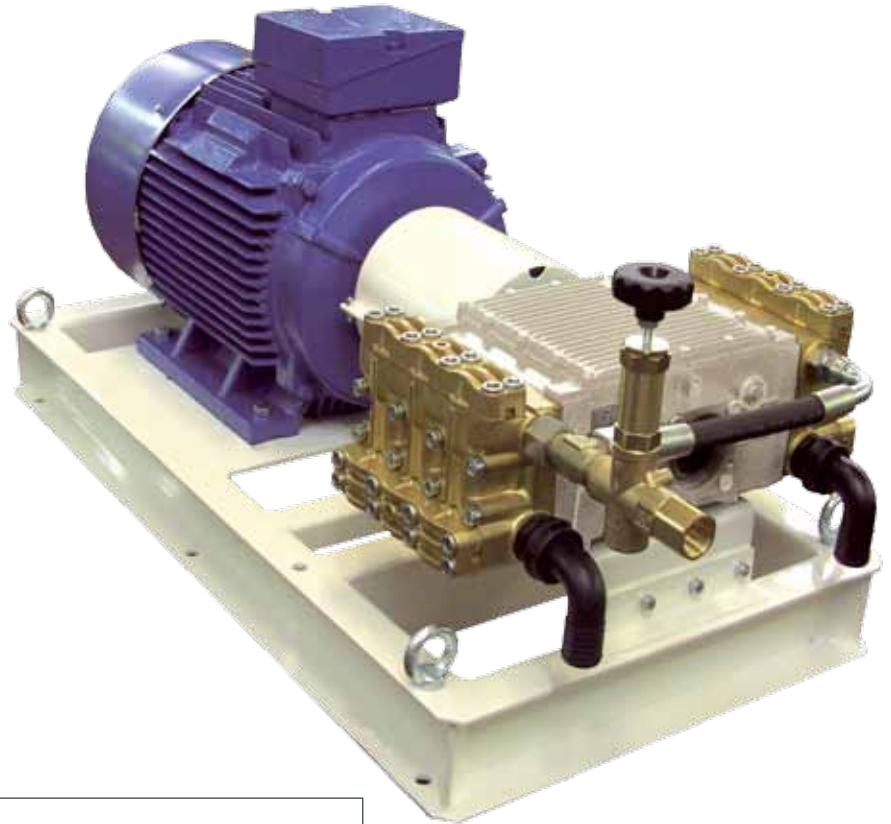

BASAMENTO / BASE

| | | |
|---------------------|------|-----------------------------|
| DIMENSIONI SIZES | mm | 1230x640 / 1370x640 / |
| | inch | 48.43"x25.20" 53.93"x25.20" |
| PESO WEIGHT | Kg | 70 / 154 |
| | lbs | |

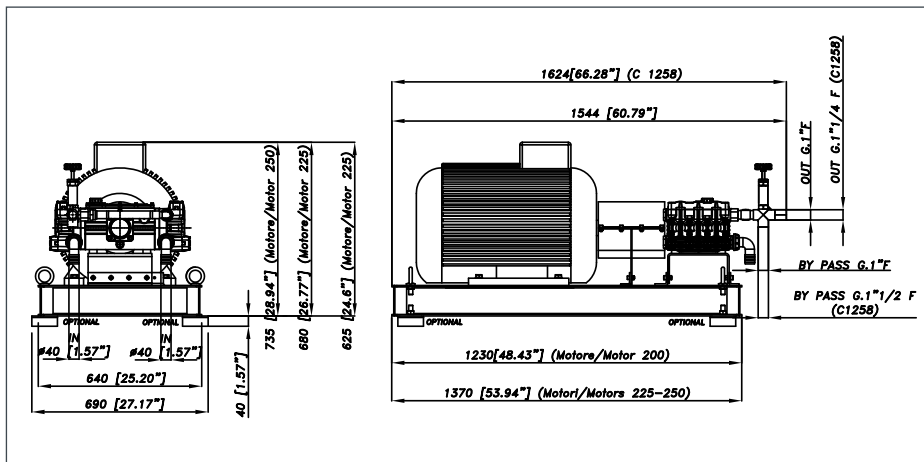

CARATTERISTICHE - FEATURES

| CODICI PART NR. | | | POMPA PUMP | MOTORE TRIFASE THREE-PHASE MOTOR | | | RPM | PRESSIONE PRESSURE | | PORTATA FLOW | | PESO GRUPPO COMPLETO POWER UNIT WEIGHT | |
|---|--------------------------|---|---------------|-------------------------------------|----|------|------|-----------------------|------|-----------------|------|---|------|
| GRUPPO ELETTROPOMPA POWER UNIT (A) | BASAMENTO BASE (B) | GRUPPO COMPLETO COMPLETE POWER UNIT (A+B) | | 50Hz-400V | KW | A | | Bar | PSI | L/min | GPM | Kg | LBS |
| 76.9102.97.3 | 73.9501.97.3 | 76.9202.97.3 | C 1538 | 200L 4 POLI | 30 | 56.6 | 1450 | 100 | 1450 | 151 | 40.0 | 410 | 902 |
| 76.9100.97.3 | 76.9500.97.3 | 76.9200.97.3 | C 1248 | 225M 6 POLI | 30 | 58.9 | 975 | 80 | 1160 | 192 | 50.8 | 475 | 1045 |
| 76.9101.97.3 | 76.9501.97.3 | 76.9201.97.3 | C 1258 | 250M 6 POLI | 37 | 69.3 | 975 | 70 | 1015 | 245 | 64.7 | 591 | 1300 |